

VX-160KIT

VDSL2 SFP Modems (CO & RT)

Overview

Versa Technology's VX-160KIT is a VDSL2 SFP modem that interconnects with Gateway Processor by using a MSA (MultiSource Agreement) compliant hot pluggable electrical interface. The DSL chipset inside the VDSL2 SFP modem supports all VDSL2 profiles that defined by ITU-T G.993.2, and more importantly, it can be fully backward compatible with ADSL2/ ADSL2+ and VDSL. Compliancy with G.994.1 and G.997.1 standards, ensures its interoperability with all existing broadband network services. Furthermore, Versa's VX-160KIT also features the latest ITU standards such as G.inp (G.998.4) and G.vector (G.993.5).




Key Features

As broadband access technology has evolved rapidly, Service Providers need to upgrade their broadband network service every few years. Traditionally, Service Providers have replaced the entire CPE device in order to provide subscribers with faster Internet services. Not only does it increase their CAPEX and OPEX but also wastes resources and increase inventories. Leveraging the VX-160KIT VDSL2 SFP in Service Providers' product portfolio will help them significantly reduced the software porting and testing effort and shorten their product time-to-market.

Versa Technology's VX-160KIT VDSL2 SFP modem realizes the modulation of VDSL2 broadband access. It can be integrated with routers, switches or residential gateways that are equipped with a SFP type of WAN interface. There's no more need for Service Providers to maintain more than one type of CPE device in the field or in the warehouse, moreover, this also can give them the possibility to future upgrade. Users can upgrade to any broadband access data rate easily only by plugging in different type of WAN SFPs such as VDSL2 35b/G.fast or optical TRx SFPs with the same internet box and user interface.


- Support all VDSL2 standards defined in ITU –T G.993.2, G.994.1, G.997.1
- Backward compatible with ADSL2/ ADSL2+
- MSA compliant hot pluggable electrical interface
- Support G.inp (G.998.4) and G.vector (G.993.5)

Application

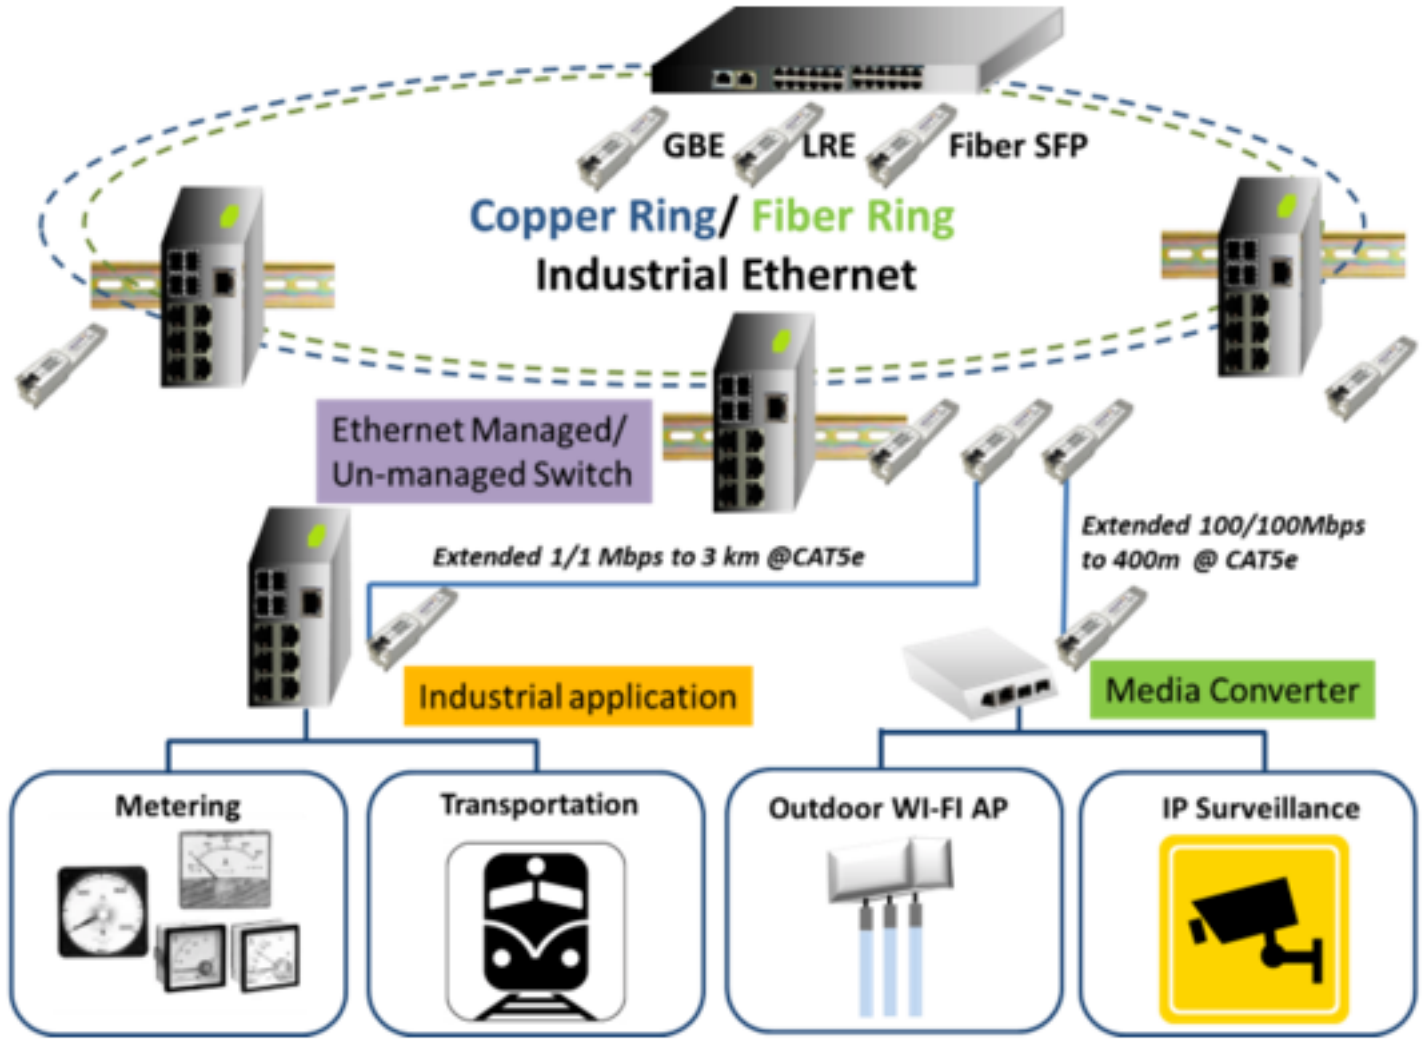


Graphs

Symmetric Profile Data Rate (over Cat 5e)

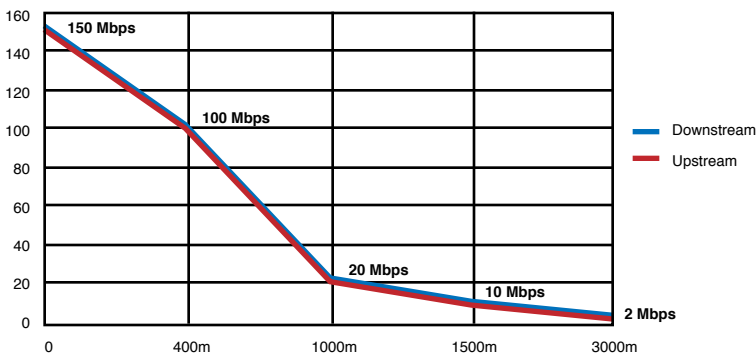

Symmetric Profile Data Rate (over 26AWG)

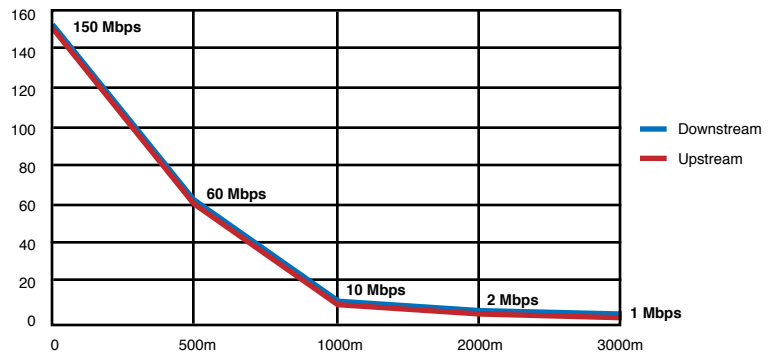

Specifications

VDSL2 Transmission Modes

VDSL2 Profiles	<ul style="list-style-type: none">• 8a, 8b, 8c, 8d, 12a, 12b, 17a, 30a
Data Rate	<ul style="list-style-type: none">• Up to 100 Mbps upstream / 100 Mbps downstream
Annex	<ul style="list-style-type: none">• A/ B/ C
Parameter	<ul style="list-style-type: none">• 997.1 Compliant
Configurability	<ul style="list-style-type: none">• Implement the system setting via the EBM Program

ADSL2+ Transmission Modes

Annex	<ul style="list-style-type: none">• A/ B/ M
Data Rate	<ul style="list-style-type: none">• Up to 24Mbps
Modes	<ul style="list-style-type: none">• PTM & ATM (AAL5 and OAM cell's)
PVC	<ul style="list-style-type: none">• Up to 8 PVCs
VC	<ul style="list-style-type: none">• Up to 65k VCs

Advanced Features from ITU

G.inp	<ul style="list-style-type: none">• Supports G.inp described by ITU
G.vector	<ul style="list-style-type: none">• Supports all CPE features of G.vector
ROC	<ul style="list-style-type: none">• Supports Robust Overhead Channel
Dual Latency	<ul style="list-style-type: none">• Supported

OLR

- Supports bit swapping, SRA, SoS and dynamic Interleaver depth (D) change

US0

- Supported

PBO

- Both UPBO and DPBO supported

Other Unique Features

Booting

- Serial Flash

QoS

- Flexible packet sorting based on Ether Type, VLAN ID or VLAN priority (supports QinQ).

Network Interface

Hardware

- RJ-45 female connector (Fully compatible with RJ-11 male connector)
- SGMII/SERDES connect to host
- LED 1 (Remain Undefined)
- LED 2 (PWR/Link Status Indicator)

Software

- Self Boot & Managed by Internal Flash
- Support Ethernet Boot & Management

Power Requirement

- 0.3 W (each module)

SFP Interface

- SERDES

Certification

- CE / FCC

Environment

Operating Temperature

- -20 to 75°C (SFP Cage)

Storage Temperature

- -20 to 85°C

Operating Humidity

- 10% to 90% (non-condensed)

Storage Humidity

- 5% to 95% (non-condensed)

Surge Protection

- 2kV